

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

## **IMAGES ARE BEST AVAILABLE COPY.**

As rescanning documents *will not* correct images,  
Please do not report the images to the  
Image Problem Mailbox.

**This Page Blank (uspto)**



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>7</sup> :</b> <b>H04B 1/40, 1/04, 1/16</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 00/31885</b> <b>(43) International Publication Date:</b> 2 June 2000 (02.06.00)
<b>(21) International Application Number:</b> PCT/FI99/00974 <b>(22) International Filing Date:</b> 25 November 1999 (25.11.99) <b>(30) Priority Data:</b> 982559 26 November 1998 (26.11.98) FI <b>(71) Applicant (for all designated States except US):</b> NOKIA MOBILE PHONES LTD. [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). <b>(72) Inventors; and</b> <b>(75) Inventors/Applicants (for US only):</b> VÄISÄNEN, Risto [FI/FI]; Vähäsillankatu 10 B 5, FIN-24100 Salo (FI). KALTIOKALLIO, Kim [FI/FI]; Pähkinärinne 4, FIN-24240 Salo (FI). <b>(74) Agent:</b> BERGGREN OY AB; P.O. Box 16, FIN-00101 Helsinki (FI).		<b>(81) Designated States:</b> AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). <b>Published</b> <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
<b>(54) Title:</b> METHOD AND ARRANGEMENT FOR TRANSMITTING AND RECEIVING RF SIGNALS THROUGH VARIOUS RADIO INTERFACES OF COMMUNICATION SYSTEMS		
<b>(57) Abstract</b> <p>The invention pertains to a method and arrangement for transmitting and receiving RF signals associated with different radio interfaces of communication systems. The solution according to the invention uses a direct conversion based transceiver which substantially has got one receive signal branch and one transmit signal branch. Also, the mixing frequencies of the different systems are generated by means of one and the same synthesizer. This is achieved by using an output frequency divider in connection with the synthesizer, and by performing the filtering corresponding to the system's channel bandwidth by means of a controllable low-pass filter operating at the baseband frequency.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## Method and arrangement for transmitting and receiving RF signals through various radio interfaces of communication systems

The invention relates to a method and arrangement for transmitting and receiving RF signals associated with various radio interfaces of communication systems. The invention finds particular utility in transceivers of general-purpose mobile stations.

Mobile communication systems are developing and expanding rapidly which has lead to a situation in which there are in many areas systems complying with several different standards. This has brought about a need for mobile stations that can be used in more than one system. Good examples are the digital systems called GSM (Global System for Mobile communications) and DCS (Digital Cellular System), which operate on different frequency bands but have otherwise similar radio interfaces. In addition, the modulation, multiplexing and coding schemes used may be different. The systems mentioned above use the time division multiple access (TDMA) method; other methods include the frequency division multiple access (FDMA) and code division multiple access (CDMA).

One possible way of making a mobile station capable of operating in multiple systems is to have in the mobile station completely separate signal paths for each system. This, however, would lead to an unreasonable increase in the mobile station size and manufacturing costs. Therefore, the goal is to design a mobile station in which the differences relating to the radio interfaces of the various systems could be largely dealt with by means of programming, instead of having separate signal processing paths.

It is known e.g. from patent application document EP 653851 a transceiver arrangement using one local oscillator the frequency of which falls between the lower operating frequency band and the higher operating frequency band such that one and the same intermediate frequency (IF) can be used for both operating frequency bands. However, the disadvantage of such a solution is that the necessary IF stages make the implementation rather complex, and the manufacturing costs of the device will be high because of the great number of components. Furthermore, the IF stages require filters in order to eliminate spurious responses and spurious emissions. In addition, channel filtering at the intermediate frequency sets great demands on the IF filters.

In a direct-conversion, or zero-IF, receiver the radio-frequency (RF) signal is directly converted into baseband without any intermediate frequencies. Since no IF

stages are needed, the receiver requires only a few components, therefore being an advantageous solution for general-purpose mobile stations which have multiple signal branches for different systems. To aid in understanding the problems relating to the direct conversion technique and prior art it is next described in more detail a prior-art solution.

Fig. 1 shows a direct conversion based arrangement for realizing a dual frequency band transceiver, known from the Finnish Patent document FI 100286. Depending on the receive frequency band, a RF signal received by an antenna is coupled by means of switch 104 either to a first receive branch (DCS) or second receive branch (GSM). If the received signal is in the DCS frequency band, it is conducted to band-pass filter 106, low-noise amplifier (LNA) 108 and bandpass filter 110. After that the signal is brought to block 112 which produces signal components having a 90-degree phase difference. The in-phase component I and quadrature component Q are further conducted by means of switches 114 and 134 to mixers 116 and 136. The mixers get their mixing signals from a DCS synthesizer 140 the frequency of which corresponds to the received carrier frequency so that the mixing produces the in-phase and quadrature components of the complex baseband signal. The baseband signal is further processed in the receive (RX) signal processing unit, block 139.

If the signal received is a GSM signal, switch 104 directs the received signal to the GSM branch which comprises, connected in series, bandpass filter 126, low-noise amplifier 128, bandpass filter 130 and phase shifter 132 which generates two signals with a mutual phase difference of 90 degrees. The signals are further conducted by means of switches 114 and 134 to mixers 116 and 136 where the mixing frequency is now determined by a signal coming from the GSM synthesizer 150 via switch 161. The signals produced by the mixers are further conducted to the baseband RX signal processing unit 139.

The DCS synthesizer comprises in a known manner a phase-locked loop (PLL) which includes a voltage-controlled oscillator (VCO) 141 the output signal of which is amplified at amplifier 146 thus producing the synthesizer output signal. The frequency of the signal from oscillator 141 is divided by an integer Y in divider 142 and the resulting signal is conducted to phase comparator 143. Similarly, the frequency of the signal generated by reference oscillator 158 is divided by an integer X in divider 144 and conducted to phase comparator 143. The phase comparator produces a signal proportional to the phase difference of said two input signals, which signal is conducted to a low-pass filter (LPF) 145 producing a filtered signal that controls the voltage-controlled oscillator 141. The phase-locked

loop described above operates in a known manner in which the output frequency of the synthesizer becomes locked to the frequency coming to the phase comparator from the reference frequency branch. The output frequency is controlled by varying the divisor Y.

- 5 The GSM synthesizer 150 comprises a voltage-controlled oscillator 150, amplifier 156, dividers 152 and 154, phase comparator 153 and a low-pass filter 155. The GSM synthesizer operates like the DCS synthesizer described above, but the output frequency of the GSM synthesizer corresponds to GSM frequency bands.

10 In the transmitter part, a baseband complex transmit (TX) signal is processed in a TX signal processing unit wherefrom the in-phase and quadrature components of the signal are conducted to mixers 162 and 182 that produce a carrier-frequency signal by multiplying the input signal by the mixing signal. If the transmission is at the DCS frequency, switch 161 selects the DCS synthesizer's output signal as the mixing signal. The carrier-frequency signal is conducted through switch 164 to the  
15 DCS branch where a 90-degree phase shift is first produced between the in-phase component and quadrature component, and the resulting signals are then summed, block 166. The resulting DCS signal is conducted to bandpass filter 168, amplifier 170, and bandpass filter 172. The RF signal thus produced is further conducted to the antenna 102 via switch 180.

- 20 If the transmission is at the GSM frequency, the output signal of the GSM synthesizer is used as the mixing signal. The resulting carrier-frequency signal is conducted to the GSM branch in which it is processed in the same manner as in the DCS branch blocks 186, 188, 190 and 192. The RF signal thus produced is conducted to the antenna 102 via switch 180. One and the same antenna 102 can be  
25 used in both transmission and reception if the TX and RX circuits are coupled to the antenna through a duplex filter, for example. If the apparatus is designed to operate in two or more frequency bands, it needs separate filters for each frequency band.

The circuit arrangement described above has, however, some disadvantages. First, separate carrier-frequency signal branches in the receiver and in the transmitter add  
30 to the complexity, size and manufacturing costs of the transceiver. Second, each operating frequency band needs a separate synthesizer of its own.

An object of the invention is to provide a simple solution for realizing a programmable transceiver operating in a plurality of systems in such a manner that the aforementioned disadvantages related to the prior art can be avoided.

In the direct conversion based transceiver according to the invention signal processing can be performed using one and the same signal processing line regardless of the system. This is achieved using the signal processing steps set forth below.

5 The method according to the invention for processing signals received from different radio interfaces of communication systems is characterized in that it comprises steps in which

- a carrier-frequency signal is received from a radio interface,
- the carrier-frequency signal is bandpass-filtered,
- the filtered carrier-frequency signal is amplified,
- 10 - an RX mixing signal at the receive frequency is generated,
- a complex baseband signal is generated from the received carrier-frequency signal by mixing it with the RX mixing signal,
- the baseband signal generated is low-pass-filtered,
- the baseband signal generated is amplified,
- 15 - the baseband signal is converted digital, and
- the baseband signal converted digital is processed to produce an information signal encoded and modulated into the received signal.

20 The method according to the invention for processing signals transmitted to different radio interfaces of communication systems is characterized in that it comprises steps in which

- a digital baseband quadrature signal is generated on the basis of the information signal to be transmitted,
- the digital baseband signal is converted analog,
- a TX mixing signal at the transmit frequency is generated,
- 25 - a carrier-frequency transmission signal is generated from the baseband signal by mixing it with the TX mixing signal,
- the carrier-frequency signal generated is amplified, and
- the transmission signal is sent to the radio interface.

30 The direct-conversion receiver according to the invention operating at different interfaces of communication systems is characterized in that it comprises

- antenna means for receiving a radio-frequency signal,
- bandpass filter for filtering a carrier-frequency signal,
- first RX amplifier for amplifying the filtered carrier-frequency signal,
- means for generating an RX mixing signal at the receive frequency,
- 35 - mixing means for generating a complex baseband signal from the received signal using the RX mixing signal,

- low-pass filter for filtering the baseband signal,
  - second amplifier for amplifying the baseband signal,
  - analog-to-digital converter for converting the baseband signal digital, and
  - means for processing the baseband signal converted digital to produce an
- 5 information signal encoded and modulated into the received signal.

The direct-conversion transmitter according to the invention operating at different radio interfaces of communication systems is characterized in that it comprises

- means for generating a digital baseband quadrature signal on the basis of the information signal to be transmitted,
- 10 - digital-to-analog converter for converting the baseband transmission signal analog,
- synthesizer for generating a TX mixing signal at the transmit frequency,
- mixing means for producing a signal at the carrier frequency from the baseband transmission signal using the TX mixing signal,
- TX amplifier for amplifying the signal at the carrier frequency, and
- 15 - antenna means for transmitting the amplified transmission signal at the carrier frequency.

Other preferred embodiments of the invention are described in the dependent claims.

- 20 In the present invention, signal band limiting is advantageously performed at the baseband frequency so that there is no need for "steep" filters and, therefore, system-specific filter lines. Filtering can thus be performed as low-pass filtering using a filter with a controllable cut-off frequency. This way, it is possible to completely avoid separate system-specific channel filtering circuits.

- 25 To enable the generation of mixing frequencies of the different operating frequency bands by one and the same synthesizer it is advantageously used frequency division of the synthesizer output signal. If the synthesizer's operating frequency is set higher than the frequencies used in the systems, it is possible to generate, in conjunction with the synthesizer frequency division, two mixing signals with a 90-degree phase difference, thus avoiding the need for phase shifters on the signal line and achieving
- 30 a good phase accuracy.

Using the solution according to the invention it is possible to realize a general-purpose transceiver which is considerably simpler and more economical to manufacture than prior-art solutions. The circuit arrangement according to the invention requires only one TX signal branch and one RX signal branch. Moreover, one and

the same synthesizer may be used to generate the mixing signals. Furthermore, there is no need for channel filters operating at the radio frequency. Therefore, the circuitry can be easily integrated. Since the invention involves only a few components, the advantages of the transceiver according to the invention include small size and low power consumption.

The invention will now be described in more detail with reference to the accompanying drawing wherein

- Fig. 1 shows a block diagram of a dual-band direct-conversion transceiver according to the prior art,
- Fig. 2 shows in the form of block diagram a solution according to the invention for a direct-conversion transceiver operating in multiple systems.

Fig. 1 was already discussed in conjunction with the description of the prior art. Next, a transceiver according to the invention will be described, referring to Fig. 2.

- Fig. 2 shows in the form of block diagram a transceiver according to the invention. A RF signal received through an antenna is conducted via matching circuits 1 to controllable bandpass filters 2. The matching circuits 1 may advantageously be controllable (AX) with respect to the operating frequency band. A controllable bandpass filter 2 may be advantageously realized using a plurality of bandpass filters so that the RF signal is conducted via switch elements controlled by a control signal FX1 from the matching circuit 1 to the bandpass filter that corresponds to the selected operating frequency band. The bandpass filter may also be realized so as to be adjustable and tuneable by means of programming. The bandpass filtered carrier-frequency signal is further conducted to a low-noise amplifier 4, the gain of which is advantageously controllable. The control signal is marked GX1 in the drawing. In addition to amplifier 4, it is also possible to have integrated amplifiers in connection with the bandpass filters.

- The signal is then conducted to a mixer 5 in which the carrier-frequency signal is mixed with an RX mixing signal at the receive frequency to produce a baseband quadrature signal. The RX mixing signal is advantageously generated by a synthesizer 10 the output signal frequency of which is divided by a divider 11 so as to correspond to the selected receive frequency. The synthesizer 10 operates in a similar manner as the synthesizers depicted in Fig. 1. Thus it comprises a voltage-controlled oscillator VCO which produces an output signal. The frequency of the VCO output signal is divided by S1 in a divider in the phase-locked loop PLL. The

resulting signal is conducted to a first input of a phase comparator in the phase-locked loop. Similarly, the frequency of a signal generated by a reference oscillator in the phase-locked loop PLL is divided by an integer and conducted to a second input of the phase comparator. The phase comparator produces a signal which is proportional to the phase difference of the two input signals and conducted to a low-pass filter, and the filtered signal then controls the voltage-controlled oscillator VCO. The output frequency is controlled by varying the divisor S1.

The synthesizer output signal is divided in divider 11 by N1 so that the RX mixing signal corresponds to the selected receive frequency band. The output frequency of the synthesizer may be e.g. in the 4-GHz band, so that with 2-GHz systems the synthesizer output frequency is divided by two, and with 1-GHz systems it is divided by four (N1). This way, systems operating in the 1-GHz and 2-GHz bands can be covered with a synthesizer the operating frequency band of which is narrow with respect to the operating frequency.

To produce a quadrature baseband signal the mixer needs two mixing signals with a phase shift of 90 degrees. Phase-shifted components may be produced by a phase shifter in connection with the mixer or they may be produced as quotients generated already in the frequency divider 11, thus achieving an accurate phase difference. Therefore, it is advantageous to use a synthesizer operating frequency which is a multiple of the highest system frequency.

The in-phase component I and quadrature component Q from the mixer 5 are further conducted to low-pass filters 6. The higher cut-off frequency of the low-pass filters is advantageously controllable with control signal FX3. Thus the filtering can be performed at a bandwidth corresponding to the selected radio interface, and since the filtering is performed at baseband, it is easy to get the filtering function steep. Also, no strict demands are set on the bandpass filtering (2) of the RF signal.

The baseband signal is further conducted to a gain control block 7 which possibly includes an offset voltage correction block. On the other hand, considering the broad bandwidth of the CDMA system, the offset voltage can easily be removed by high-pass filtering. The amplifier advantageously realizes automatic gain control (AGC). Finally, the signal is converted digital in an analog-to-digital converter 8, and the digital baseband signal is further processed in a digital signal processor (DSP) 9. Channel filtering may also be performed digitally in the DSP, whereby the low-pass filtering of the baseband signal may be performed using a fixed cut-off

frequency. Then, however, the dynamics of the analog-to-digital converter must be considerably better.

5 In the transmitter part, a quadrature baseband signal is first digitally generated in block 9 on the basis of the information signal to be sent. The components of the digital signal are converted analog by digital-to-analog converters 14, whereafter the analog signals are low-pass filtered by low-pass filters 15. Advantageously, the cut-off frequency of the low-pass filters can be controlled with control signal FX4 so as to correspond to the specifications of the selected radio interface.

10 A TX mixing signal at the carrier frequency is generated by a synthesizer 13 and divider 12. The synthesizer 13 operates in a similar manner as the synthesizer 10 in the receiver part. Moreover, the synthesizers may share a reference oscillator. The frequency of the synthesizer output signal is controlled with control signal S2 within the synthesizer's operating frequency range. The frequency of the output signal from synthesizer 13 is divided in divider 12 so as to correspond to the selected transmission frequency band. Components phase-shifted by 90 degrees are generated from the TX mixing signal in order to perform complex mixing in mixer 16. The phase-shifted components may be generated in the same way as in the receiver part.

20 The signal at the carrier frequency is then amplified in an amplifier 17, the gain of which is advantageously controllable in order to set the transmission power and realize automatic gain control (AGC). The control signal is marked GX3 in Fig. 2. The signal is then conducted to a power amplifier 18. The operating frequency band of the power amplifier is advantageously selectable with control signal BX. This can be achieved e.g. such that the amplifier comprises partly separate signal lines for the different operating frequency bands.

25 The RF signal generated is filtered by a bandpass filter 3. The pass band of the bandpass filter is advantageously controllable with control signal FX2. This can be realized in the same way as in the receiver part. The receiver and transmitter part filters 2 and 3 are advantageously realized in duplex filter pairs for each transmit-receive frequency band associated with a given system. The filters may advantageously be surface acoustic wave (SAW) or bulk acoustic wave (BAW) filters so that several filters with their switches may be attached to one component.

The control signals in the mobile station transceiver according to Fig. 2 are preferably generated in a control block of the mobile station which advantageously comprises a processing unit such as a microprocessor. The control block generates

the signal on the basis of a system switch instruction input from the keypad of the mobile station, for example. System selection may be e.g. menu-based so that the desired system is selected by choosing it from a displayed menu by pressing a certain key on the keypad. The control block then generates the control signals that correspond to the selected system. The system switch instruction may also come via the mobile communication system in such a manner that data received from the system may include a system switch instruction on the basis of which the control block performs the system switch. Advantageously, a control program is stored in a memory unit used by the control block, which control program monitors the received data and, as it detects a system switch instruction in the data, gives the control block an instruction to set the control signals into states according to the selection instruction.

The implementation of the blocks described above is not illustrated in more detail as the blocks can be realized on the basis of the information disclosed above, applying the usual know-how of a person skilled in the art.

Above it was described embodiments of the solution according to the invention. Naturally, the principle according to the invention may be modified within the scope of the invention as defined by the claims appended hereto, e.g. as regards implementation details and fields of application. It is especially noteworthy that the solution according to the invention may be well applied to communication systems other than the mobile communication systems mentioned above. Apart from the cellular radio interface proper, the solution may be used to realize e.g. a GPS receiver for the location of a mobile station or other apparatus. Furthermore, the operating frequencies mentioned are given by way of example only, and the implementation of the invention is in no way restricted to them.

It is also noteworthy that the solution according to the invention may be applied to all current coding techniques such as the narrow-band FDMA (Frequency Division Multiple Access) and TDMA (Time Division Multiple Access), as well as the broadband CDMA (Code Division Multiple Access) technique. In addition, the solution according to the invention may be used to realize an FM (Frequency Modulation) receiver.

Below is a table listing some of the so-called second generation mobile communication systems to which the present invention may be applied. The table shows the most important radio interface related characteristics of the systems.

CELLULAR SYSTEM	AMPS	IS-54/-136	IS-95 US CDMA	GSM Global System for Mobile Communications	DCS 1800	PDC Personal Digital Cellular	DECT Digital European Cordless Telephone	PHS Personal Handy Phone System
RX FREQ. ( MHz )	869-894	869-894	869-894	935-960	1805-1880	810-826, 1429-1453	1880-1900	1895-1918
TX FREQ. ( MHz )	824-849	824-849	824-849	890-915	1710-1785	940-956, 1477-1501	1880-1900	1895-1918
RF BANDWIDTH	25 MHz	25 MHz	25 MHz	25 MHz	75 MHz	16 MHz 24 MHz	20 MHz	23 MHz
MULTIPLE ACCESS METHOD	FDMA	TDMA/ FDMA	CDMA/FDMA	TDMA/FDMA	TDMA/ FDMA	TDMA/FDMA	TDMA/ FDMA	TDMA/ FDMA
DUPLEX METHOD	FDD	FDD	FDD	FDD	FDD	FDD	TDD	TDD
NUMBER OF CHANNELS	832	832, 3 users/ channel	20, 798 users/ channel	124, 8 users/channel	374, 8 users/ channel	1600, 3 users/ channel	10, 12 users/ channel	300 4 users/ channel
CHANNEL SPACING	30 kHz	30 kHz	1250 kHz	200 kHz	200 kHz	25 kHz	1.728 MHz	300 kHz
MODULATION	FM	$\pi/4$ DQPSK	QPSK/ OQPSK	GMSK 0.3 Gaussian filter	GMSK 0.3 Gaussian filter	$\pi/4$ DQPSK	GFSK 0.3 Gaussian filter	$\pi/4$ DQPSK
CHANNEL BIT RATE	-	48.6 kb/s	1.2288 Mb/s	270.833 kb/s	270.833 kb/s	42 kb/s	1.152 Mb/s	384 kb/s

Below is another table listing some of the so-called third generation mobile communication systems to which the present invention may be applied. The table shows the most important radio interface related characteristics of the systems.

<b>CELLULAR SYSTEM</b>	<b>WCDMA</b>	
RX FREQ. ( MHz )	2110 - 2170	1900 – 1920
TX FREQ. ( MHz )	1920 – 1980	1900 – 1920
MULTIPLE ACCESS METHOD	CDMA	TDMA
DUPLEX METHOD	FDD	TDD
CHANNEL SPACING	5 MHz	5 MHz
MODULATION	QPSK	
CHANNEL BIT RATE	144 kb/s in rural outdoor, 500 kb/ s in urban outdoor and up to 2 Mb/s in indoor	

## Claims

1. A method for processing signals received from different radio interfaces of communication systems, **characterized** in that it comprises steps in which
  - a carrier-frequency signal is received from a radio interface,
  - 5 - the signal at the carrier frequency is bandpass-filtered,
  - the filtered signal at the carrier frequency is amplified,
  - an RX mixing signal at the receive frequency is generated,
  - a complex baseband signal is generated from the received carrier-frequency signal by mixing it with the RX mixing signal,
  - 10 - the baseband signal generated is low-pass filtered,
  - the baseband signal generated is amplified or attenuated prior to analog-to-digital conversion,
  - the baseband signal is converted digital, and
  - the baseband signal converted digital is processed so as to produce an information
  - 15 signal encoded and modulated into the received signal.
2. A method for processing signals transmitted to different radio interfaces of communication systems, **characterized** in that it comprises steps in which
  - a digital baseband quadrature signal is generated on the basis of the information
  - 20 - the digital baseband signal is converted analog,
  - a TX mixing signal at the transmit frequency is generated,
  - a carrier-frequency transmission signal is generated from the baseband signal by mixing it with the TX mixing signal,
  - the carrier-frequency signal generated is amplified, and
  - 25 - the transmission signal is transmitted to the radio interface.
3. A direct-conversion receiver operating at different radio interfaces of communication systems, **characterized** in that it comprises
  - antenna means for receiving a carrier-frequency signal from a radio interface,
  - bandpass filter (2) for filtering the carrier-frequency signal,
  - 30 - first receiver amplifier (4) for amplifying the filtered carrier-frequency signal,
  - means (10, 11) for generating an RX mixing signal at the receive frequency,
  - mixing means (5) for generating a complex baseband signal from the received signal by means of the RX mixing signal,
  - low-pass filter (6) for filtering the baseband signal,
  - 35 - second amplifier (7) for amplifying the baseband signal,
  - analog-to-digital converter (8) for converting the baseband signal digital, and

- means (9) for processing the baseband signal converted digital so as to produce an information signal encoded and modulated into the received signal.

4. The receiver of claim 3, **characterized** in that it comprises means for selecting the pass band of the bandpass filter (2, FX1) such that it corresponds to the receive  
5 frequency.

5. The receiver of claim 3 or 4, **characterized** in that it comprises means for controlling the gain of said first amplifier.

6. The receiver of any one of claims 3 to 5, **characterized** in that the means (10, 11) for generating a mixing signal at the receive frequency comprises an RX synthesizer (10, S1) and controllable frequency divider (11, N1) for dividing the  
10 frequency of the output signal generated by the RX synthesizer.

7. The receiver of claim 6, **characterized** in that said frequency divider is arranged so as to divide the output signal of the RX synthesizer always by at least two in order to generate an RX mixing signal.

15 8. The receiver of any one of claims 3 to 7, **characterized** in that it comprises means (6, FX3) for controlling the cut-off frequency of low-pass filtering in order to perform channel filtering according to the selected radio interface.

9. The receiver of any one of claims 3 to 8, **characterized** in that it comprises means for implementing channel filtering realized in a digital manner.

20 10. The receiver of any one of claims 3 to 9, **characterized** in that it comprises means (7, GX2) for controlling the gain of the second amplifier.

11. The receiver of any one of claims 3 to 10, **characterized** in that the signal processing path comprises substantially the same components for connecting to the different radio interfaces.

25 12. A direct-conversion transmitter operating at different radio interfaces of communication systems, **characterized** in that it comprises  
- means (9) for generating a digital baseband quadrature signal on the basis of the information signal to be transmitted,  
- digital-to-analog converter (14) for converting the baseband transmission signal  
30 analog,  
- synthesizer (10, 11) for generating a TX mixing signal at the transmit frequency,

- mixing means (16) for producing a signal at the carrier frequency from the base-band transmission signal by means of the TX mixing signal,
  - transmitter amplifier (7, 8) for amplifying the signal at the carrier frequency, and
  - antenna means for transmitting the amplified transmission signal at the carrier
- 5 frequency.

13. The transmitter of claim 12, **characterized** in that it comprises a controllable low-pass filter (15, FX4) for filtering a baseband transmission signal in order to perform channel filtering according to the radio interface selected.

10 14. The transmitter of claim 12 or 13, **characterized** in that it comprises means for implementing channel filtering realized in a digital manner.

15 15. The transmitter of claim 12, 13 or 14, **characterized** in that the means (10, 11) for generating a TX mixing signal at the transmit frequency comprises a TX synthesizer (13, S2) and controllable frequency divider (12, N2) for dividing the frequency of the output signal generated by the TX synthesizer.

16 16. The transmitter of claim 15, **characterized** in that said frequency divider is arranged so as to divide the TX synthesizer's output signal always at least by two in order to generate a TX mixing signal.

17. The transmitter of any one of claims 12 to 16, **characterized** in that it comprises means (17, GX3) for controlling the gain of the transmitter amplifier.

20 18. The transmitter of any one of claims 12 to 17, **characterized** in that it comprises means (18, BX) for controlling the operating frequency band of the transmitter amplifier.

25 19. The transmitter of any one of claims 12 to 18, **characterized** in that it comprises a bandpass filter for filtering the amplified transmission signal at the carrier frequency, and means for selecting the pass band of the transmitter bandpass filter (3, FX2) so that it corresponds to the transmission frequency.

20. The transmitter of any one of claims 12 to 19, **characterized** in that the signal processing path comprises substantially the same components for connecting to the different radio interfaces.


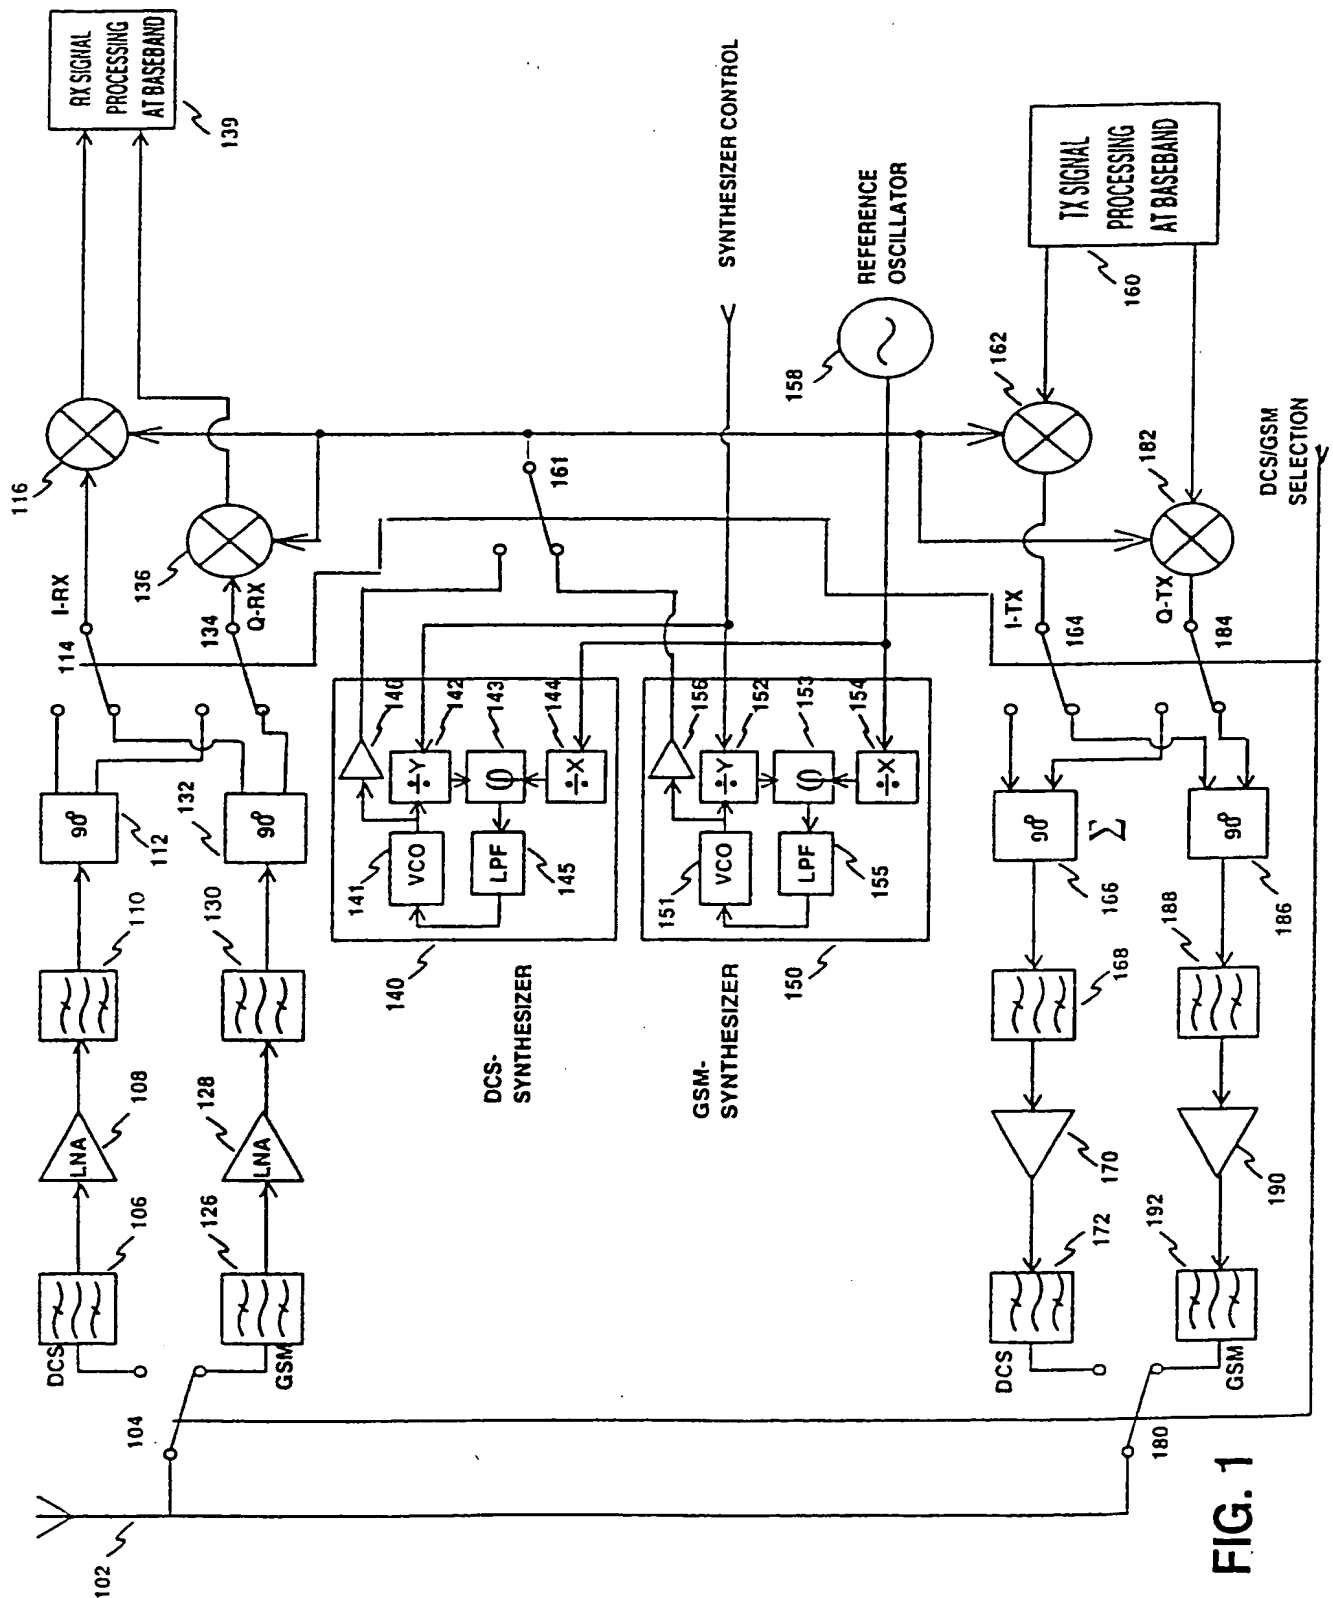


FIG. 1

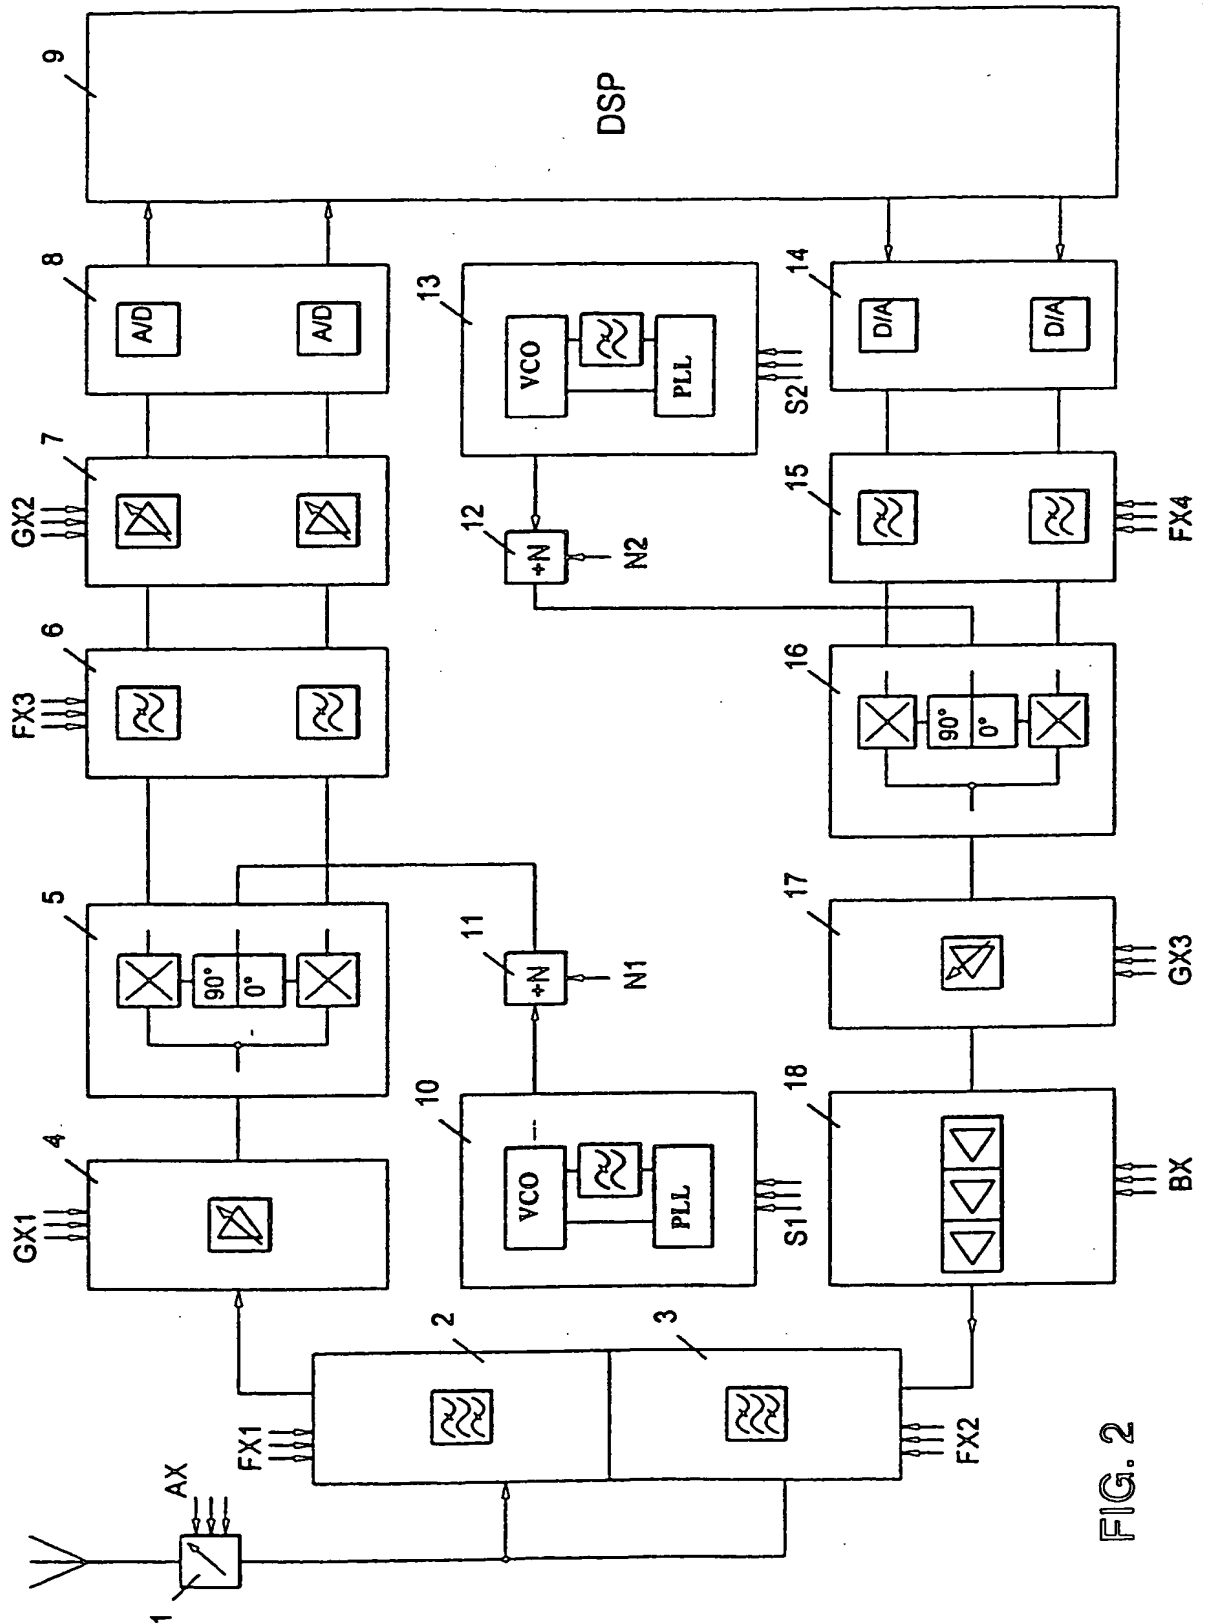

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 99/00974

## A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04B 1/40, H04B 1/04, H04B 1/16  
According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	WO 9901933 A2 (TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)), 14 January 1999 (14.01.99), see the claims --	1,3-11
X	US 4395776 A (YUKIO NAITO ET AL), 26 July 1983 (26.07.83), claims 1-9 --	2,12-20
X	EP 0633674 A2 (MITSUBUSHI DENKI KABUSHIKI KAISHA), 11 January 1995 (11.01.95), claims 1-9 --	2,12
X	EP 0813312 A2 (MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.), 17 December 1997 (17.12.97), claims 1-3,8, 12 --	1,3-5,8-11

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&amp;" document member of the same patent family

Date of the actual completion of the international search

6 April 2000

Date of mailing of the international search report

13 -04- 2000

Name and mailing address of the ISA/  
Swedish Patent Office  
Box 5055, S-102 42 STOCKHOLM  
Facsimile No. +46 8 666 02 86

Authorized officer

Rune Bengtsson/mj  
Telephone No. +46 8 782 25 00

# INTERNATIONAL SEARCH REPORT

Information on patent family members

02/12/99

International application No.

PCT/FI 99/00974

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
WO	9901933	A2	14/01/99	AU	8135998 A	25/01/99
US 4395776 A			26/07/83	EP	0036431 A,B	30/09/81
				SE	0036431 T3	
				JP	1420478 C	14/01/88
				JP	56047131 A	28/04/81
				JP	62017904 B	20/04/87
				WO	8100942 A	02/04/81
EP 0633674 A2			11/01/95	JP	7022971 A	24/01/95
				US	5548825 A	20/08/96
EP 0813312 A2			17/12/97	CA	2208276 A	10/12/97
				CN	1175176 A	04/03/98
				JP	10065749 A	06/03/98